


# SERIE MAX DYNAMIC®

Acoplamiento con cubierta de poliuretano ideal para ambientes agresivos.

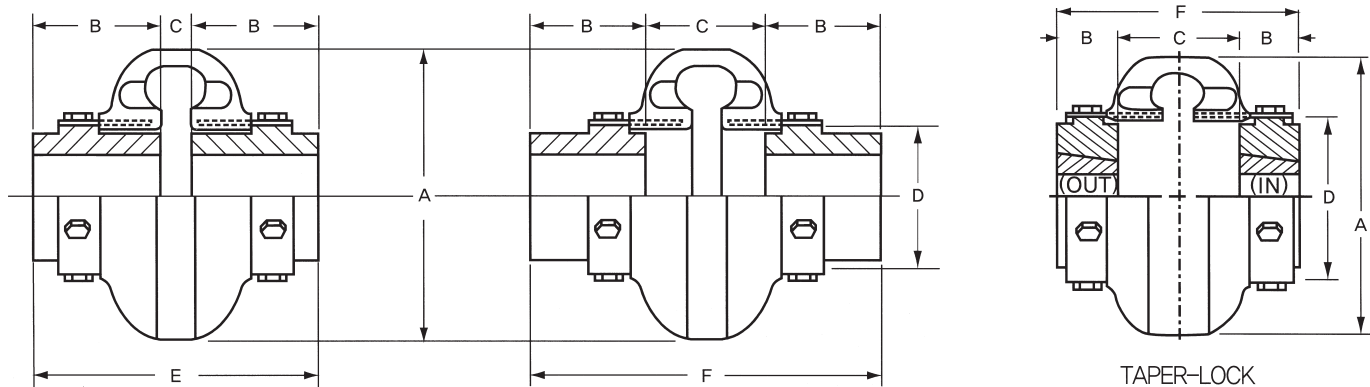

| Tamaño | Par Nominal Nm | Máx. agujero (mm) | Máx. r.p.m. | Dimensiones (mm) |               |                  |                  |           |                |          |
|--------|----------------|-------------------|-------------|------------------|---------------|------------------|------------------|-----------|----------------|----------|
|        |                |                   |             | A                | B             | C                |                  | D         | E              | F        |
|        |                |                   |             | exterior diá.    | cubo longitud | Mín. espacio eje | Máx. espacio eje | cubo diá. | Longitud total |          |
|        |                |                   |             |                  |               |                  |                  |           | interior       | exterior |
| D-2    | 22             | 28                | 7,500       | 89               | 24            | 35               | 47               | 47        | 83             | 95       |
| D-3    | 42             | 34                | 7,500       | 102              | 37            | 9                | 47               | 59        | 83             | 121      |
| D-4    | 64             | 42                | 7,500       | 116              | 37            | 9                | 47               | 66        | 83             | 121      |
| D-5    | 110            | 48                | 7,500       | 137              | 45            | 10               | 52               | 80        | 100            | 142      |
| D-10   | 167            | 55                | 7,500       | 162              | 45            | 11               | 53               | 93        | 101            | 143      |
| D-20   | 267            | 60                | 6,600       | 184              | 50            | 15               | 63               | 114       | 115            | 163      |
| D-30   | 421            | 75                | 5,800       | 210              | 56            | 12               | 68               | 138       | 124            | 180      |
| D-40   | 634            | 85                | 5,000       | 241              | 61            | 12               | 74               | 168       | 134            | 196      |
| D-50   | 882            | 90                | 4,200       | 279              | 69            | 12               | 86               | 207       | 150            | 224      |
| D-60   | 1.440          | 105               | 3,800       | 318              | 80            | 11               | 99               | 222       | 171            | 259      |
| D-70   | 2.540          | 120               | 3,600       | 356              | 85            | 18               | 109              | 235       | 189            | 281      |
| D-80   | 4.550          | 155               | 2,000       | 406              | 114           | 17               | 149              | 286       | 245            | 377      |
| D-100  | 9.800          | 171               | 1,900       | 533              | 140           | 44               | 95               | 359       | 324            | 375      |
| D-120  | 19.610         | 190               | 1,800       | 635              | 152           | 57               | 124              | 448       | 362            | 429      |

## SERIE TAPER

| Tamaño | Par Nominal Nm | Taper N° | Máx. agujero (mm) | Máx. r.p.m. | Dimensiones (mm) |               |                 |     |           |                 | Peso (kg) |        |
|--------|----------------|----------|-------------------|-------------|------------------|---------------|-----------------|-----|-----------|-----------------|-----------|--------|
|        |                |          |                   |             | A                | B             | C               |     | D         | F               |           |        |
|        |                |          |                   |             | exterior diá.    | cubo longitud | Interior in     |     | cubo diá. | Longitud total  |           |        |
| D-3    | 42             | 1008     | 25                | 7,500       | 102              | 22            | 43.0            |     | 59        | 87              |           | 0.82   |
| D-4    | 64             | 1008     | 25                | 7,500       | 116              | 22            | 43.0            |     | 66        | 87              |           | 1.18   |
| D-5    | 110            | 1108     | 28                | 7,500       | 137              | 22            | 56.0            |     | 80        | 100             |           | 1.81   |
| D-10   | 167            | 1310     | 35                | 7,500       | 162              | 25            | 52.0            |     | 93        | 103             |           | 2.72   |
| D-20   | 267            | 1610     | 42                | 6,600       | 184              | 25            | 63.5            |     | 114       | 114             |           | 4.08   |
| D-30   | 421            | 2012     | 50                | 5,800       | 210              | 32            | 65.0            |     | 138       | 129             |           | 6.17   |
| D-40   | 634            | 2517     | 65                | 5,000       | 241              | 44            | 60.0            |     | 168       | 149             |           | 9.89   |
| D-50   | 882            | 2517     | 65                | 4,200       | 279              | 44            | 76.0            |     | 207       | 165             |           | 14.29  |
| D-60   | 1.440          | 3020     | 75                | 3,800       | 318              | 51            | 84.0            |     | 222       | 186             |           | 21.14  |
| D-70   | 2.540          | 3535     | 100               | 3,600       | 356              | 89            | 60.0            |     | 235       | 238             |           | 30.25  |
| D-80   | 4.550          | 4040     | 100               | 2,000       | 406              | 102           | 95.0            |     | 286       | 298             |           | 37.19  |
|        |                |          |                   |             |                  |               | in          out |     |           | in          out |           |        |
| D-100  | 9.800          | 4545     | 110               | 1,900       | 533              | 114           | 38              | 152 | 359       | 267             | 381       | 113.4  |
| D-120  | 19.610         | 5050     | 125               | 1,800       | 635              | 127           | 51              | 181 | 448       | 305             | 435       | 185.07 |

## DISEÑO CON ESPACIADOR

